SHIELDCOAT

TECHNICAL DATA SHEET

ROOFBOND
FLEXIBLE POINTING

12 YEAR GUARANTEE


DESCRIPTION

Roofbond Flexible Pointing is the perfect solution for sealing and securing ridge/barrell tiles. Crafted with a specialized acrylic compound, it adapts to your roof's natural movements, delivering a durable bond that resists both time and the elements. Its high adhesion properties provide a strong grip on concrete and clay tiles, minimizing the need for frequent touch-ups. With Roofbond Flexible Pointing, you're not just sealing gaps—you're reinforcing your entire roofing structure.

20 standard colors
Available in 2.6 Gallon pails

APPLICATION GUIDE

- Ensure that all ridges and tiles are free from dust, dirt, moss, or debris. Use a wire brush or pressure washer for stubborn buildup.
- Make sure the surface is completely dry before applying the pointing to ensure optimal adhesion.
- Apply the flexible pointing with a trowel, starting at one end and evenly covering the joint to seal any gaps.
- For best results, work the pointing into gaps for a smooth, secure bond.
- Smooth the applied material with the trowel to create a neat and uniform appearance.
- Never apply if rain is likely to accure within 2 hours.

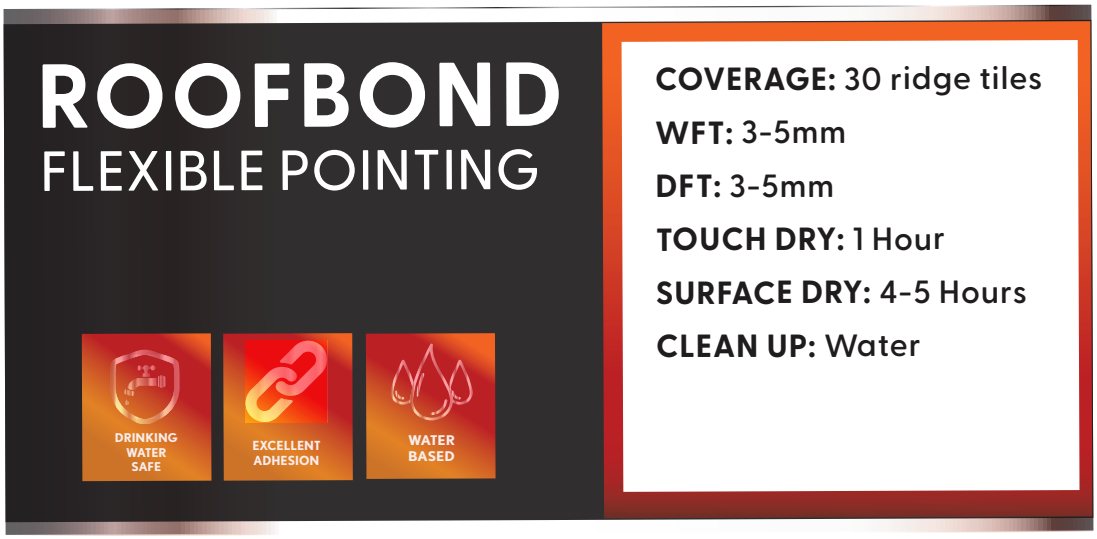

DISCLAIMER: Shieldcoat emphasizes that it is the responsibility of the applicator to assess and confirm the product's suitability for its intended use before application. The information and recommendations provided in this document were accurate and valid at the time of writing.