SHIELDCOAT

TECHNICAL DATA SHEET

ULTRANAMEL
DOOR & TRIM IR

DESCRIPTION

UltraNamel Door & Trim IR utilises advanced pure acrylic and polyurethane resin technology to produce an exceptionally durable trim paint. It dries rapidly, has a low odour, and can be easily cleaned up with water.

Designed mainly for airless spray application, UltraNamel Door & Trim IR provides a smooth, flat finish that is simple to achieve. For those who favour using a brush, they will enjoy the distinctive, silky, low-drag texture that Shieldcoat products are renowned for.


WHITE BASE AND FACTORY TINTED

2.6 Gallon Pails

Semi-Gloss & Low Sheen

APPLICATION GUIDE

- Stir the product thoroughly before use.
- Make sure the substrate is clean and free from any contamination, such as dirt, dust, or oils.
- Avoid application when temperatures are below 44.6°F or above 95°F.
- UltraNamel Door & Trim IR can be applied using a brush, roller, or airless spray gun.

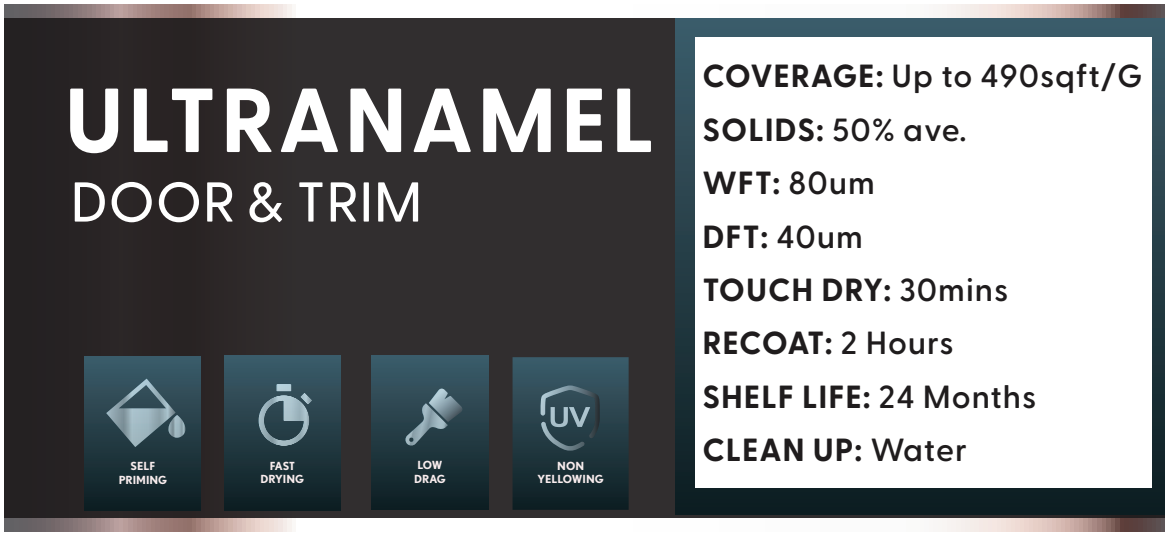

DISCLAIMER: Shieldcoat emphasizes that it is the responsibility of the applicator to assess and confirm the product's suitability for its intended use before application. The information and recommendations provided in this document were accurate and valid at the time of writing.