SHIELDCOAT

TECHNICAL DATA SHEET

ULTRASHIELD IR
INTERIOR / EXTERIOR

DESCRIPTION

Ultrashield IR Interior/Exterior merges the qualities of high-end interior paint with those of a top-tier exterior paint, resulting in an exceptional product suitable for all surfaces both inside and outside your home. Crafted with the same ingredients as our renowned roof membranes, Ultrashield is designed to endure even the toughest conditions, both indoors and outdoors, for 20 years or longer!

WHITE, DEEP, STRONG BASE AND FACTORY TINTED

Available in 4 Gallon Pails

Low Sheen/ Satin (8%)

APPLICATION GUIDE

- Stir the product thoroughly before use.
- Make sure the substrate is clean and free from any contamination, such as dirt, dust, or oils.
- Avoid application when temperatures are below 44.6°F or above 95°F.
- Ultrashield Int/Ext IR can be applied using a brush, roller, or airless spray gun.

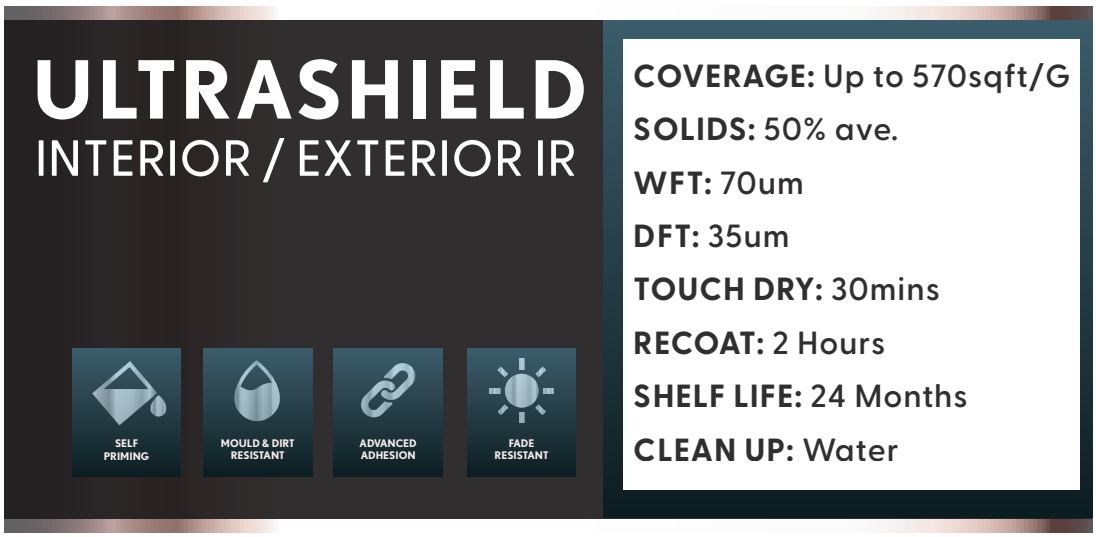

DISCLAIMER: Shieldcoat emphasizes that it is the responsibility of the applicator to assess and confirm the product's suitability for its intended use before application. The information and recommendations provided in this document were accurate and valid at the time of writing.